


# GP200

## HDPE Double Acting Impact Traffic Door – Options



With stainless steel frame for insulating panels (customized)

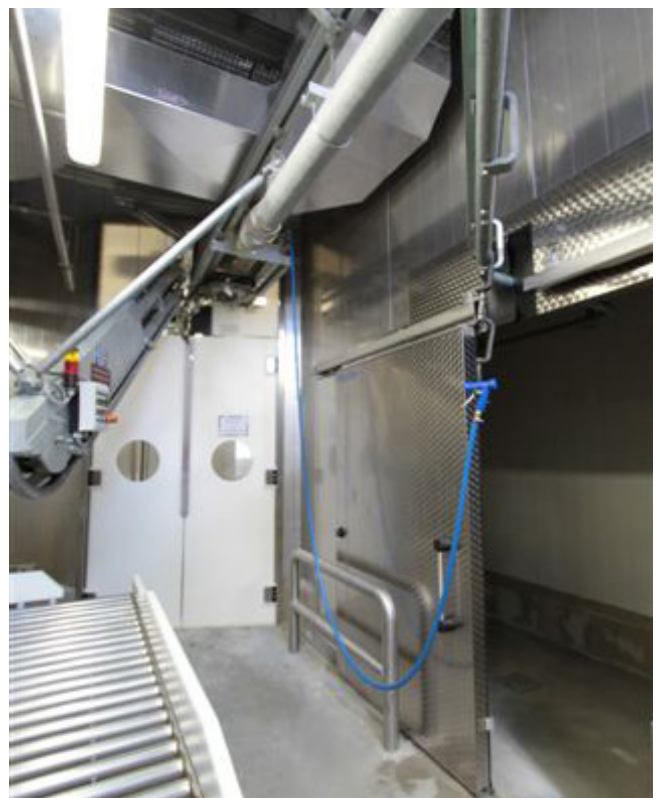

Door system with opening used for overhead conveyor




Impact panel above window and PVC finger protection



Between changing rooms and production area including stainless steel frame



With full gasketing on top, bottom and in the middle

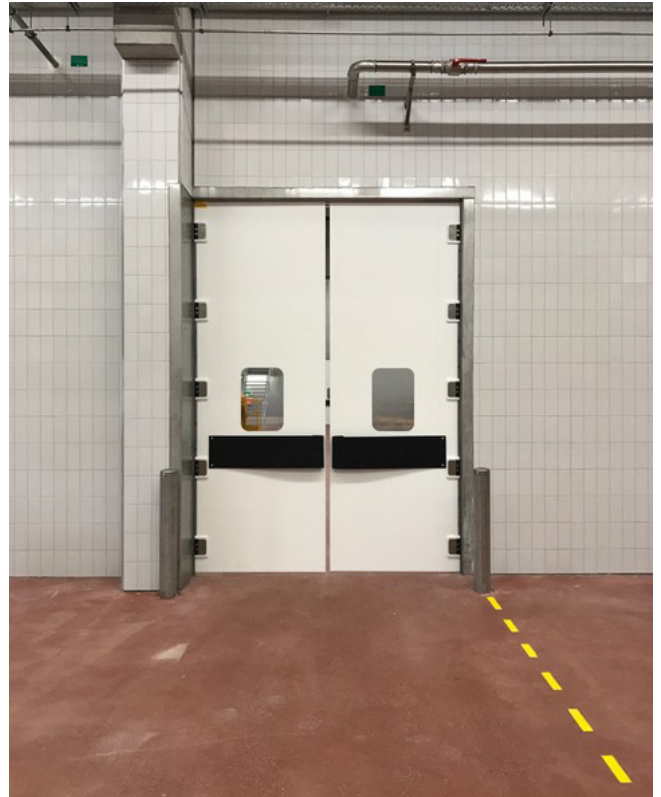

Dimension 99" x 138"



In combination with sliding door in cold storage facility



Gate system of two large traffic doors 61" x 220"



HDPE impact panel and teardrop bumper



HDPE impact panel and teardrop bumper and front gasketing



Doors with stainless steel frames for insulating panels and impact panels



HDPE teardrop bumper 47" high



Stainless steel lock and PE lock protection



In workshop with stainless steel frame, handle, impact plates and finger protection



PVC finger protection starting from 35 1/2"



In cold storage with stainless steel flat frame riveting on existing frame



GP360 PE traffic door with impact panels, teardrop bumpers and square window 24" x 24"



GP360 with 2 x 180° extra-large opening angle and 90° stop on request